

COMPANY PROFILE

Our company was founded in 2006, specializing in producing series of high-grade bathroom and kitchen products, including bathroom hardware, faucet, crystal basin, floor drains, water meter and valves etc. Factory has 6000 square meters building area, various of producing machines, and employee staff more than 100 people. Our company have producing process of hot forging, stamping, gravity casting, zinc alloy casting, CNC machining, mould design and producing, polishing and grinding, finished products testing and assembly etc., and professional at casting and forging of lead free brass. Our company have professional technical team, independent design and development ability, and professional QC management team. Quality and service is always our first target. Our company also have test equipment of spectrometer, 3D image measurement instrument, salt spray test, hardness test instrument, plating thickness test instrument etc. Regarding with quality control, we have passed ISO9001:2015 and ISO14001:2015 quality certification. Our products are mostly exported to America, Western Europe, Southeast Asia, Australia and Japan. Sincerely, we look forward to working with friend all around the world.



Ningbo Yinzhou AG Valve Co.,Ltd.

Add: No.202 Fangqiao Village,Zhanqi Town Yinzhou,Ningbo,China  
Tel: 0086 574 89216358 Fax: 0086 574 89216359  
Mb: 0086 13857446668 E-mail: sales@sinoangel.com  
Website: www.sinoangel.com Pc: 315144



Ningbo Yinzhou AG Valve Co.,Ltd.

TO BE  
BETTER LIFE


www.sinoangel.com





Pre-Rinse Units with overhead spring

- ① 4"(102mm) and 8"(203mm)Deck-mount and wall-mount base pre-rinse faucet assembly with "pop and lock" riser installation feature
- ② Overhead spring
- ③ Spring check
- ④ Riser
- ⑤ Aerator 2.2GPM
- ⑥ 40" flexible stainless steel hose
- ⑦ Magnetic hook
- ⑧ Wall bracket 1.75"(45mm) or 6"(152mm) or 9"(229mm) or 12"(305mm)
- ⑨ Single hole deck mount base faucet with flexible inlet hoses and compression fittings for 5/8" OD tubing or 1/2"NPSM male thread
- ⑩ 1/2" NPT female eccentric flanged inlets
- ⑪ Lever handles with different shapes for optional

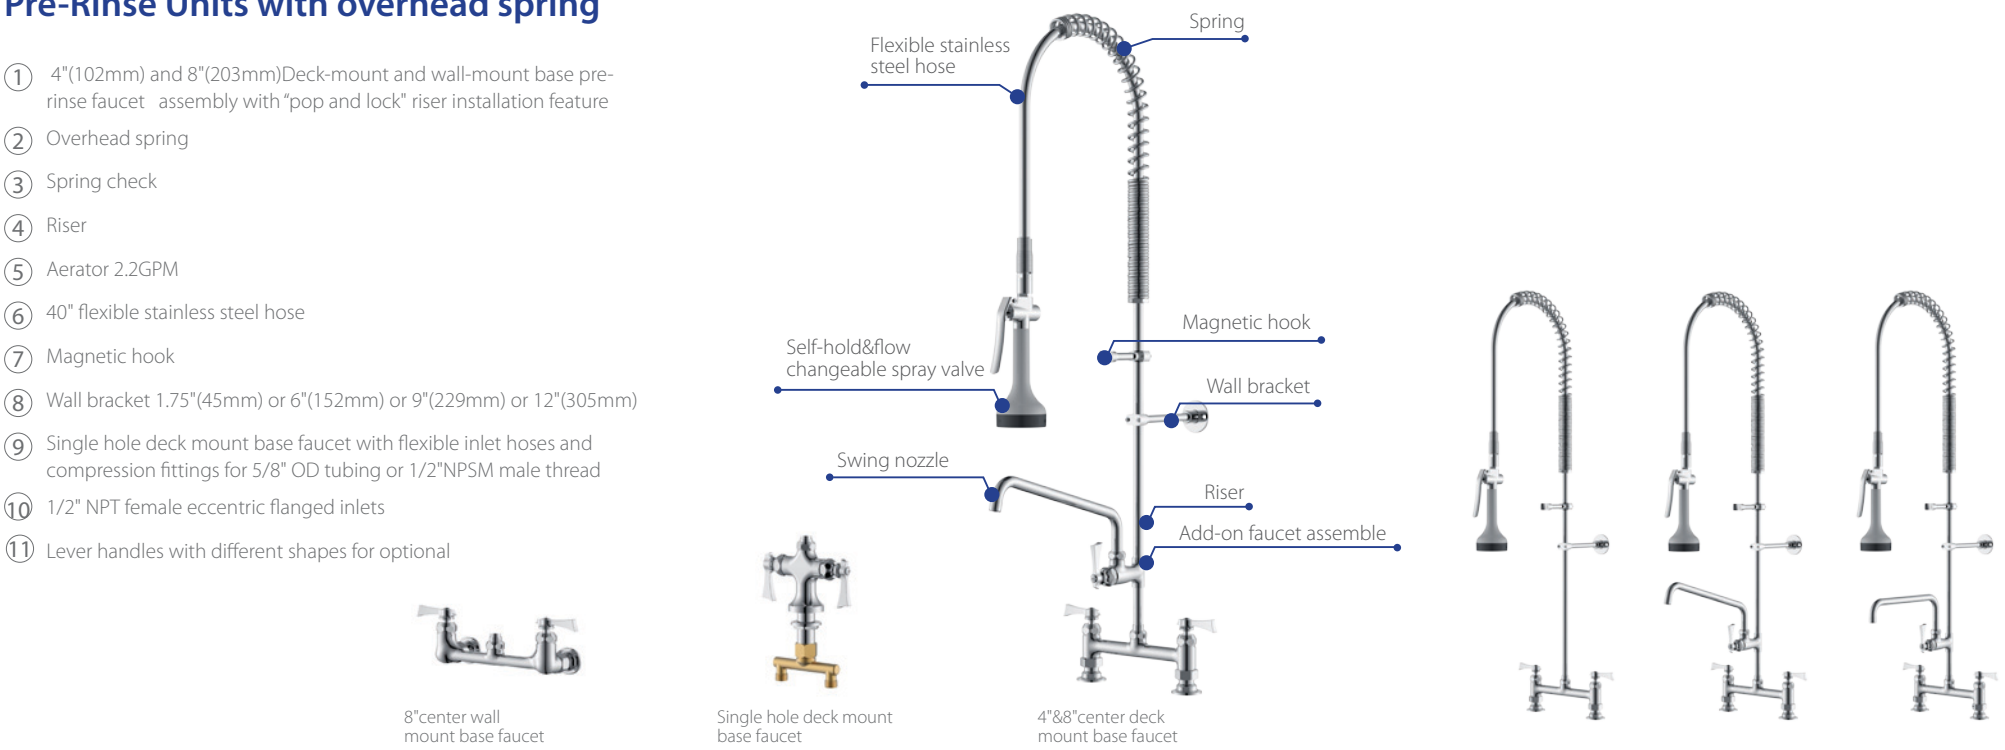


4"x8" Center deck mount base faucet	Overall Height	37.3" (947mm)	39.3" (998mm)	41.3" (1049mm)	43.3" (1100mm)	45.3" (1151mm)
	Spray valve height	9.1" (231mm)	11.1" (282mm)	13.1" (333mm)	15.1" (384mm)	17.1" (434mm)
	Riser length	18" (457mm)	20" (508mm)	22" (559mm)	24" (609mm)	26" (660mm)
8" Center wall mount base faucet	Overall Height	35.7" (907mm)	37.7" (958mm)	39.7" (1008mm)	41.7" (1059mm)	43.7" (1110mm)
	Spray valve height	7.3" (185mm)	9.3" (236mm)	11.3" (287mm)	13.3" (338mm)	15.3" (389mm)
	Riser length	18" (457mm)	20" (508mm)	22" (559mm)	24" (609mm)	26" (660mm)
Single hole deck mount base faucet	Overall Height	38" (965mm)	40" (1016mm)	42" (1067mm)	44" (1118mm)	46" (1168mm)
	Spray valve height	9.7" (246mm)	11.7" (297mm)	13.7" (348mm)	15.7" (399mm)	17.7" (450mm)
	Riser length	18" (457mm)	20" (508mm)	22" (559mm)	24" (609mm)	26" (660mm)

ADD-ON FAUCET	43.3" (1100mm)	45.3" (1151mm)	47.3" (1201mm)	49.3" (1252mm)	51.3" (1303mm)
	15" (381mm)	17" (432mm)	19" (483mm)	21" (533mm)	23" (584mm)
	18" (457mm)	20" (508mm)	22" (559mm)	24" (609mm)	26" (660mm)
	41.5" (1054mm)	43.5" (1105mm)	45.5" (1156mm)	47.5" (1207mm)	49.5" (1257mm)
	13.2" (335mm)	15.2" (386mm)	17.2" (437mm)	19.2" (488mm)	21.2" (539mm)
	18" (457mm)	20" (508mm)	22" (559mm)	24" (609mm)	26" (660mm)
	43.9" (1159mm)	45.9" (1159mm)	47.9" (1217mm)	49.9" (1267mm)	51.9" (1318mm)
	15.4" (391mm)	17.4" (442mm)	19.4" (493mm)	21.4" (544mm)	23.4" (594mm)
	18" (457mm)	20" (508mm)	22" (559mm)	24" (609mm)	26" (660mm)

Pre-Rinse Units with Overhead Swivel Arm

- ① 4"(102mm) and 8"(203mm)Deck-mount and wall-mount base pre-rinse faucet feature
- ② 12"(305mm)or18"(457mm)overhead swivel arm length
- ③ Spring check
- ④ Aerator 2.2GPM
- ⑤ 20" flexible stainless steel hose
- ⑥ Magnetic hook
- ⑦ Wall bracket 1.75"(45mm) or 6"(152mm) or 9"(229mm) or 12"(305mm)
- ⑧ Single hole deck mount base faucet with flexible inlet hoses and compression fittings for 5/8" OD tubing or 1/2"NPSM male thread
- ⑨ 1/2" NPT female eccentric flanged inlets
- ⑩ Lever handles with different shapes for optional

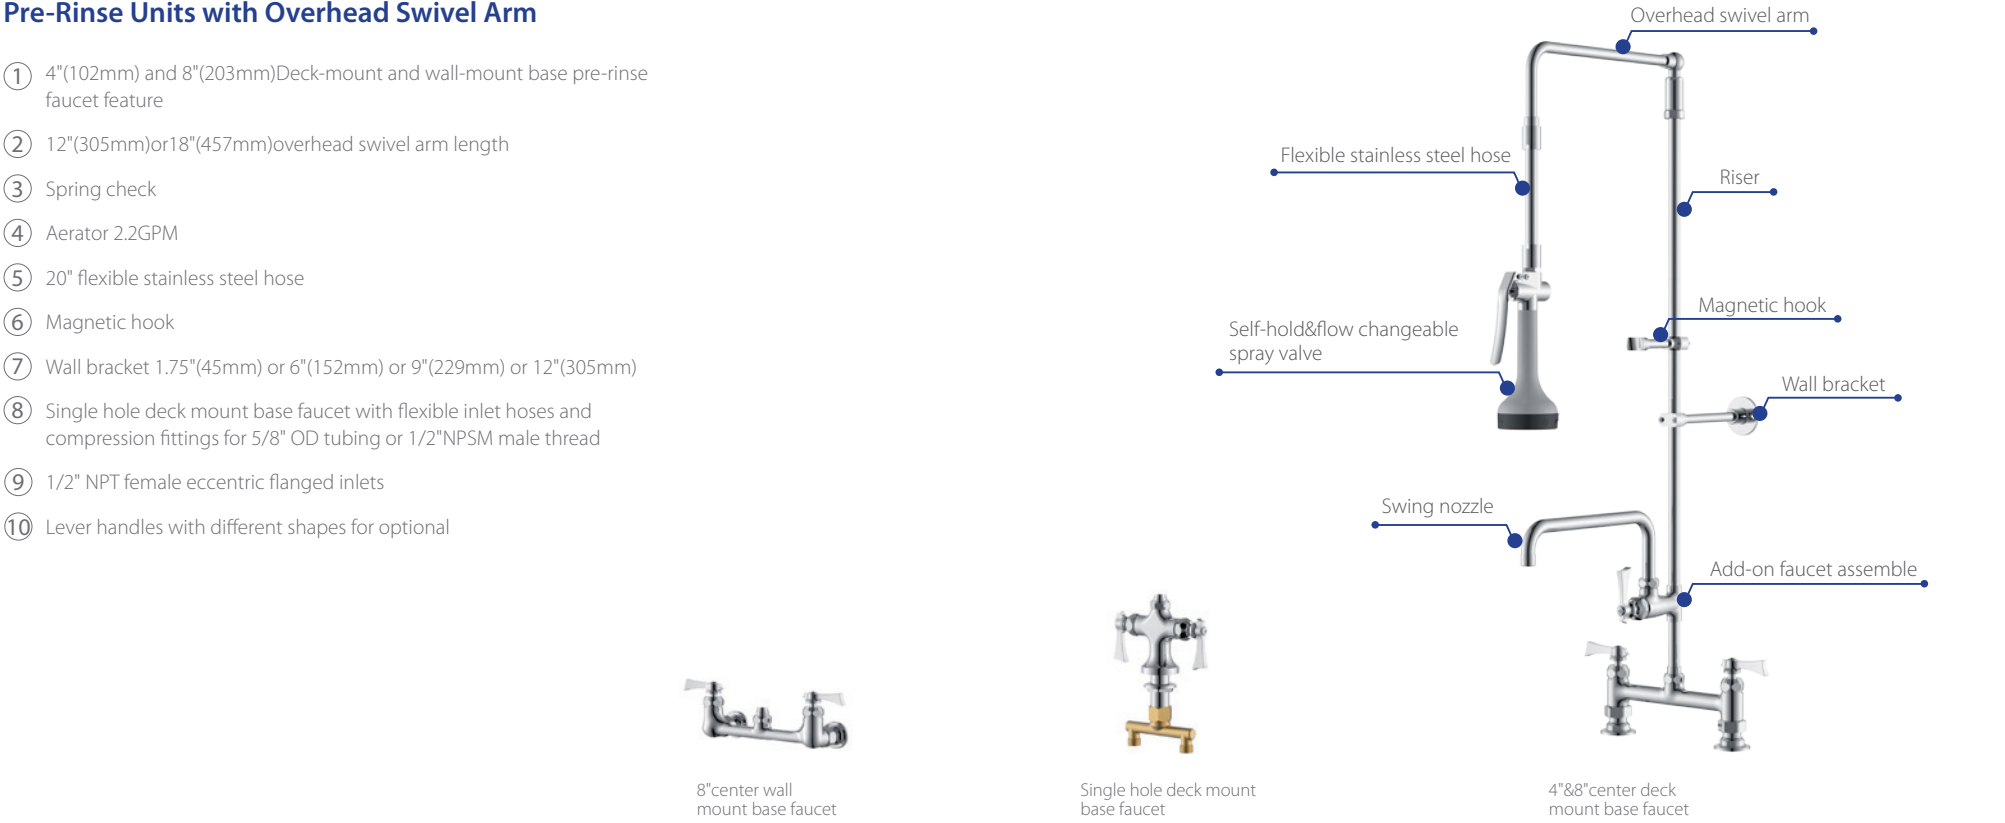


Model	ADD-ON FAUCET	Spray valve/GPM	Overall Height	Spray valve outlet height	nozzle 1 outlet Height	nozzle 2 outlet Height	Riser
4"x8" Center deck mount base faucet		1.48GPM 0.45GPM	44.2" (1123mm)	11.1" (282mm)			38" (965mm)
	ADD-ON FAUCET	1.48GPM 0.45GPM	50" (1270mm)	17" (432mm)	13.5" (343mm)	11.5" (293mm)	38" (965mm)
8" Center wall mount base faucet		1.48GPM 0.45GPM	42.8" (1087mm)	9.7" (246mm)			38" (965mm)
	ADD-ON FAUCET	1.48GPM 0.45GPM	48.6" (1235mm)	15.5" (394mm)	12.1" (307mm)	10.1" (256mm)	38" (965mm)
Single hole deck mount base faucet		1.48GPM 0.45GPM	44.8" (1138mm)	11.7" (297mm)			38" (965mm)
	ADD-ON FAUCET	1.48GPM 0.45GPM	50" (1270mm)	17.6" (447mm)	14.2" (360mm)	12.1" (308mm)	38" (965mm)



Double Pantry Faucets

- ① 4"(102mm)/8"(203mm)Wall-mount and deck-mount mixing faucet
- ② Spring check
- ③ Aerator 2.2GPM
- ④ Single hole deck mount base faucet with flexible inlet hoses and compression fittings for 5/8" OD tubing or 1/2"NPSM male thread
- ⑤ 1/2" NPT female eccentric flanged inlets
- ⑥ Lever handles with different shapes for optional

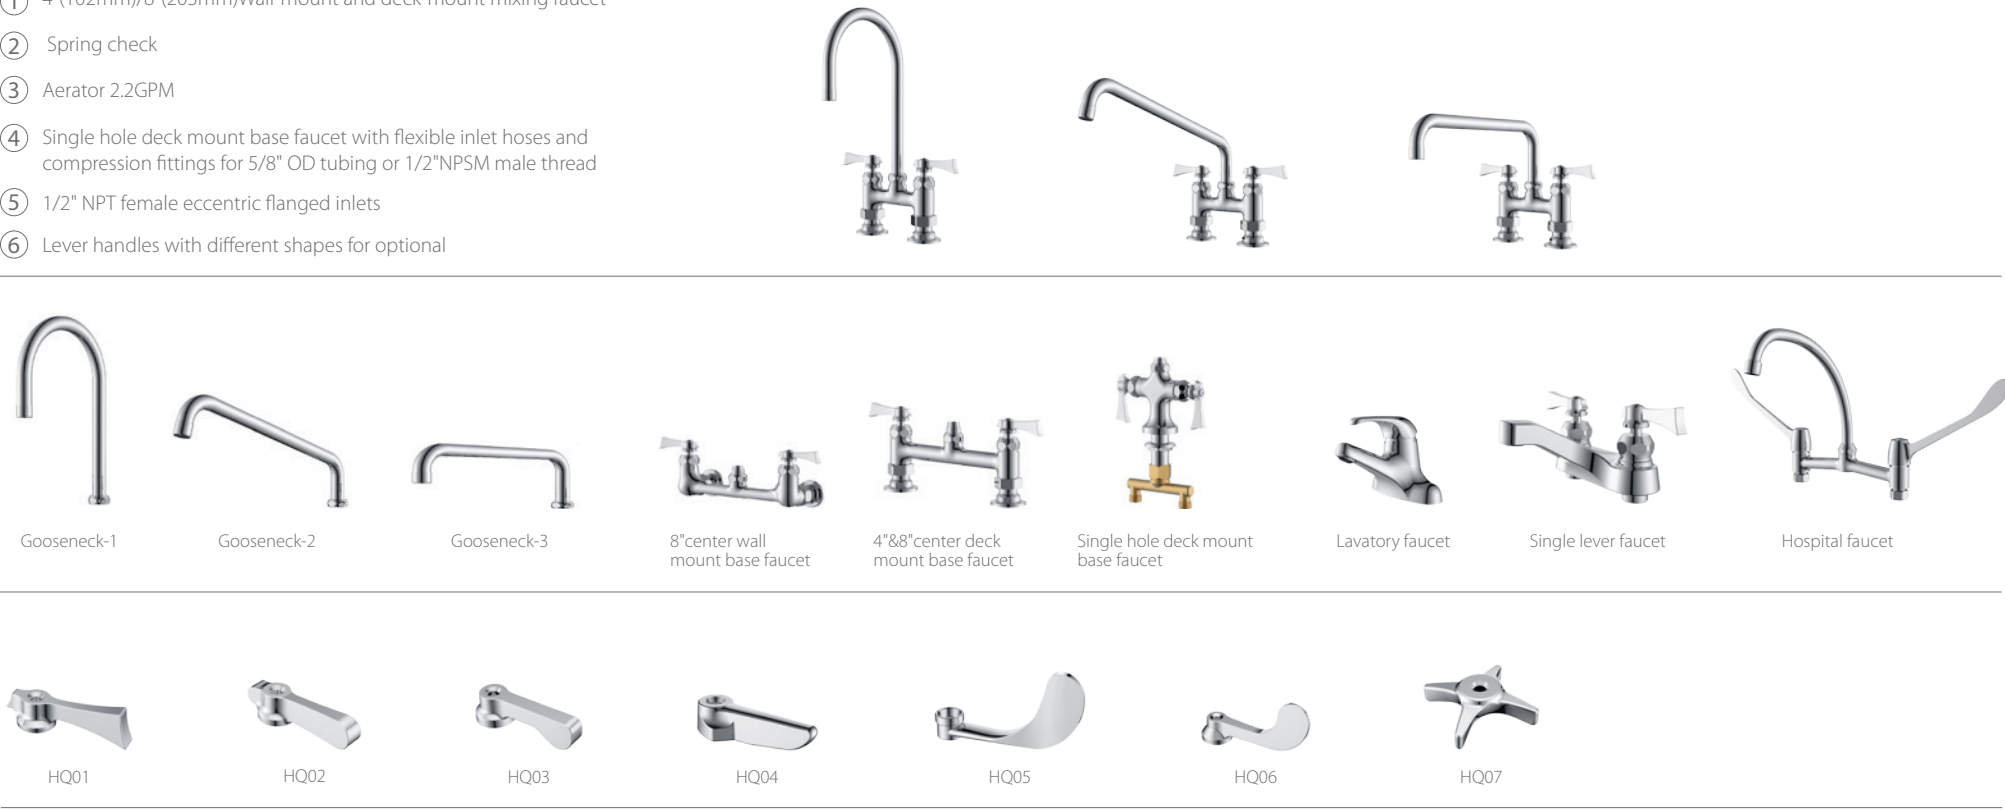

Model	Gooseneck 1	Height	Clearance	Gooseneck 2	Height	Clearance	Gooseneck 3	Height	Clearance
4"x8" Center deck mount base faucet	6"(152mm) Swivel gooseneck	13.66" (347mm)	8.29" (211mm)	6"(152mm) Swivel gooseneck	10" (254mm)	7.33" (186mm)	6"(152mm) Swivel gooseneck	8.2" (208mm)	5.33" (135mm)
	8"(203mm) Swivel gooseneck	14.66" (372.3mm)	8.29" (211mm)	8"(203mm) Swivel gooseneck	10" (254mm)	7.33" (186mm)	8"(203mm) Swivel gooseneck	8.2" (208mm)	5.33" (135mm)
	10"(254mm) Swivel gooseneck	15.66" (398mm)	8.29" (211mm)	10"(254mm) Swivel gooseneck	10" (254mm)	7.33" (186mm)	10"(254mm) Swivel gooseneck	8.2" (208mm)	5.33" (135mm)
				12" (305mm)Swivel gooseneck	10" (254mm)	7.33" (186mm)	12" (305mm)Swivel gooseneck	8.2" (208mm)	5.33" (135mm)
8" Center wall mount base faucet	6"(152mm) Swivel gooseneck	12.2" (310mm)	6.8" (173mm)	6"(152mm) Swivel gooseneck	8.5" (216mm)	5.78" (147mm)	6"(152mm) Swivel gooseneck	6.73" (171mm)	3.9" (99mm)
	8"(203mm) Swivel gooseneck	13.2" (335mm)	6.8" (173mm)	8"(203mm) Swivel gooseneck	8.5" (216mm)	5.78" (147mm)	8"(203mm) Swivel gooseneck	6.73" (171mm)	3.9" (99mm)
	10"(254mm) Swivel gooseneck	14.2" (361mm)	6.8" (173mm)	10"(254mm) Swivel gooseneck	8.5" (216mm)	5.78" (147mm)	10"(254mm) Swivel gooseneck	6.73" (171mm)	3.9" (99mm)
				12" (305mm)Swivel gooseneck	8.5" (216mm)	5.78" (147mm)	12" (305mm)Swivel gooseneck	6.73" (171mm)	3.9" (99mm)
Single hole deck mount base faucet	6"(152mm) Swivel gooseneck	14.22" (361mm)	8.85" (225mm)	6"(152mm) Swivel gooseneck	10.56" (268mm)	7.9" (201mm)	6"(152mm) Swivel gooseneck	8.76" (223mm)	5.9" (150mm)
	8"(203mm) Swivel gooseneck	15.22" (387mm)	8.85" (225mm)	8"(203mm) Swivel gooseneck	10.56" (268mm)	7.9" (201mm)	8"(203mm) Swivel gooseneck	8.76" (223mm)	5.9" (150mm)
	10"(254mm) Swivel gooseneck	16.22" (412mm)	8.85" (225mm)	10"(254mm) Swivel gooseneck	10.56" (268mm)	7.9" (201mm)	10"(254mm) Swivel gooseneck	8.76" (223mm)	5.9" (150mm)
				12" (305mm)Swivel gooseneck	10.56" (268mm)	7.9" (201mm)	12" (305mm)Swivel gooseneck	8.76" (223mm)	5.9" (150mm)

Self-hold & flow changeable Spray Valve

This is an innovative patent product, specially design with the standard of ASME A112.18.1-2012/CSA B12.1-12.Its new smart one-hand trigger lock saves time and makes the user more productive.It's built for comfort, with soft material and natural contour which fits the human hand.Mixed flow feature make easy to change the water flow shape only by rotating the spray face, fast and convenient.

Characters

- ① Convenient design
- ② Fast lock and unlock with smart self-hold trigger
- ③ Forged leadfree brass body
- ④ Vandal resistant design
- ⑤ Heat insulated touch points
- ⑥ Mixed water flow device
- ⑦ Change the flow shape and flow rate fastly only by rotating

